

SECUDA

SEDUCE SEC-200 DOOR TYPE METAL TOP SEARCH DETECTOR



En güvenilir dedektör

SECUDA



0850 8118000

info@perkotek.com

www.secuda.com.tr

SECUDA

SEDUCE SEC-200 DOOR TYPE METAL TOP SEARCH DETECTOR



It can work by receiving information for 24 hours and can give audible and illuminated alarm at the same time. The quality, effectiveness and technical features are updated according to world standards. Sensitivity of digital metal detection detector is adjustable with control point. Smallest objects even as small as a paperclip can be detected and located. make a sensitivity

buckles etc. Factories, mines, banks, luxury houses etc. Where expensive metal objects can disappear easily it is also proper for use in places where dangerous metal objects are prohibited such as airports, shopping malls, customs, prisons, exhibition halls. adjustment to prevent objects not to give a false alarm such as coins, keys, belt

6 common overlapping the separation of the detection zones, determine their location precisely according to their location. - It is in 100 sensitive, It can be set manually in the range of 0-99. -Ultra-large LED / LCD monitor and acoustic-optical alarm use at the same time. -The anti-interference features have been greatly improved by the use of digital, analogue and left-right balanced technology. -


Two or more detectors can operate at the same time. The minimum distance between two detectors is 40cm. -It can calculate the passenger flow and the number of times the automatic alarm rings. -The SECUDA Detector is protected by a setup password which can only be used by authorized personnel. -It takes only 10 minutes to install or uninstall.

Key Features

- Criteria of supplied: National standard << GB 15210
- Detecting zone: 1, 6,16,24 adjustable detecting zones
- 100 degree angle sensibility for supplying
- Percentage of transition: Over 60 at the same time and minute
- Electric Source: 220v or 110V AC, 50 / 60Hz
- Power: <= 30W
- Operating Environment: -20 ~ + 45 Degrees, <= IP 65
- Packaged Dimensions (mm): 2200 (H) x800 (W) x500(D)
- Dimensions as installed (mm): 2000(H) x 700 (W) x 500 (D)
- Weight: Approximately 92kg.

SPECIFICATION

- 1) Power on self test & fault display
- 2) Extremely high sensitivity to almost all metals
- 3) Exceptional immunity to environmental
- 4) High reliability
- 5) Rapid installation
- 6) Password protection
- 7) Dust & water protection
- 8) Harmless to cardiac pacemaker wearers pregnant women and magnetic media etc.

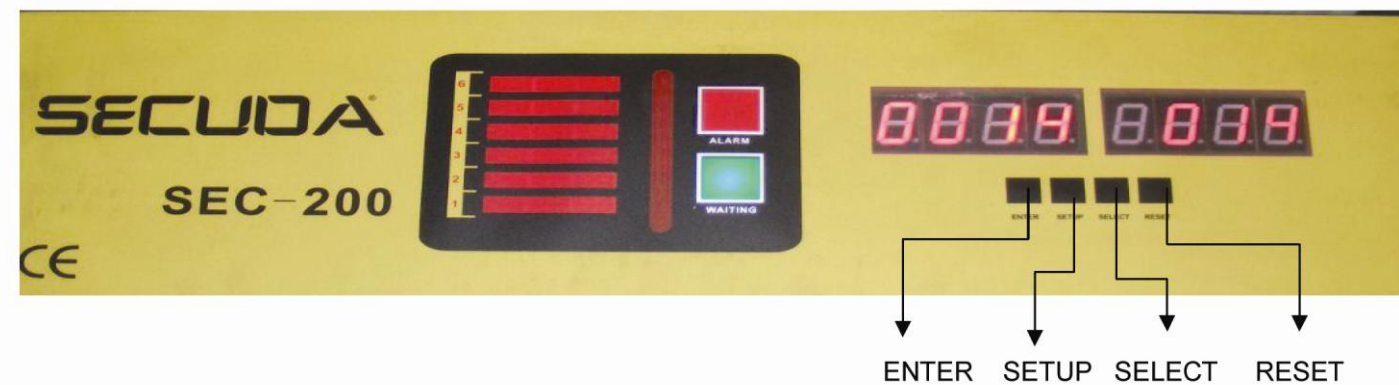

Features	SEC-100	SEC-200	SEC-300
Detecting zone	1 Zone	6 Zone	16 Zone
Sensibility	100 degree	100 degree	100 degree
Ultra-large	LED / LCD monitor	LED / LCD monitor	LED / LCD monitor
Power	<= 30W	<= 30W	<= 30W
Operating	IP 67	IP 67	IP 67
Weight	92 KG	92 KG	92 KG