


## Swing Pro HST-SLB1000

Swing Pro HST-SLB1000 Single-Lane  
Swing Pro HST-SLB1200 Double-Lane

Our Pro series Swing Pro Speed Gate represent classic and safe way to protect your premises. They are used in various Outdoor environment applications. They fit perfectly as an economical option in the office buildings and other related applications

- ✓ Highly Durable and Low Maintenance Costs
- ✓ General features and parameters settings
- ✓ SUS306 stainless steel waterproof housing
- ✓ Servo Motor Faster opening speed Gate
- ✓ Infrared Sensors for stronger detection
- ✓ General features and parameters settings
- ✓ Integration with Facial Recognition
- ✓ LED pictograms for intuitive experience

### Applications

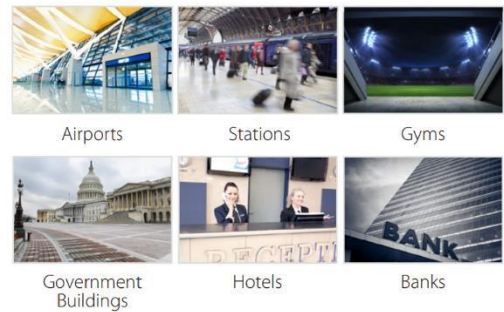

The CT-SW-100 is a single lane swing barrier turnstile series designed for smooth and silent operation and draws very little power. It's made of stainless steel which makes CT-SW-100 highly durable. CT-SW-100 are normally held in a locked position, thus denying access to the secured side.

## Specifications

Model	Pro HST-SLB1000 - SLB1200
Framework Material	Full Stainless steel (option: SUS306 stainless steel)
Arm Material	Acrylic (option: glass)
Drive Unit	Motor
MCBF	15 millions
Technical Throughput Rate	Up to 60 people perminute
Barrier Movement	Swing
Noise	<60dB
Infrared Sensor	4 pairs
LED Indicator	Not Support
Working Temperature	-25°C to 65°C
Working Humidity	20% to 95% (non-condensing)
Working Environment	Indoor / Outdoor Water proof
Lane Width	650mm (option: ≤900mm)
Dimensions (L*W*H)	1460 * 1270 * 1120 (mm) (±5mm)
Dimensions with Packaging (L*W*H)	1510 * 365 * 1216 (mm) (2 boxes)
Net Weight	80kg (±5kg)
Gross Weight	130kg (±5kg)
Cabinet Material	SPCC (option: SUS306 stainless steel)
Lid Material	Stainless steel (option: SUS306 stainless steel)
Power Supply	AC220V/110V,50/60HZ
Packing Material	Wooden case
Protection Level	IP67

